


# CALLISTO Series

GLAZED PORCELAIN



# Callisto Series - Glazed Porcelain

**WHITE**

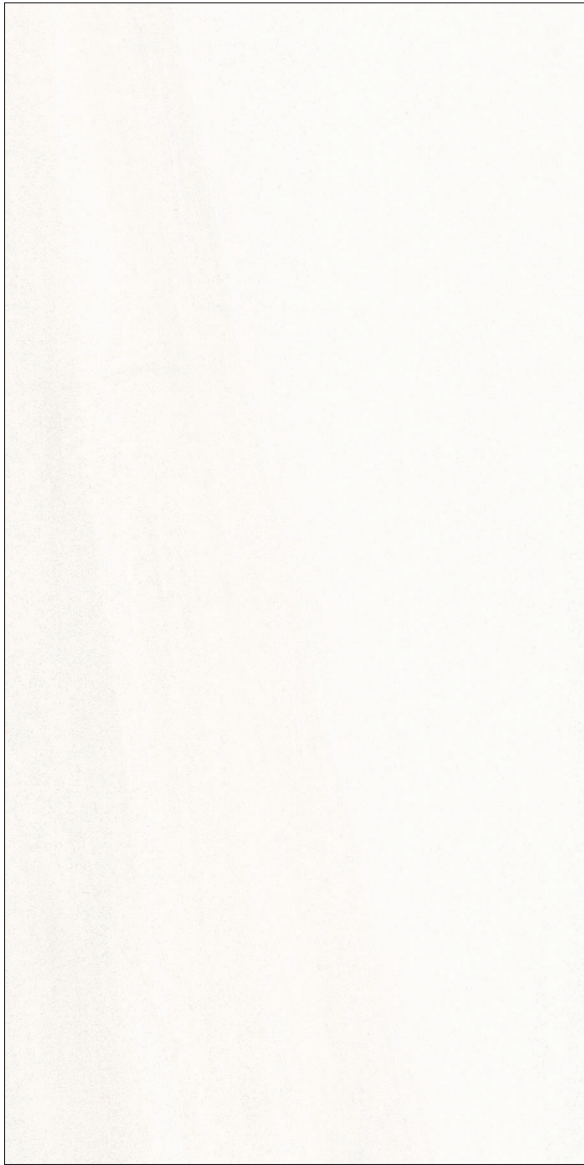

30 x 60 cm (12 x 24)  
GE.CI.WHT.1224

**IVORY**



30 x 60 cm (12 x 24)  
GE.CI.IVO.1224

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.  
For special orders please contact your Alpha Tile Sales Representative

# Callisto Series - Glazed Porcelain

**GREY**



30 x 60 cm (12 x 24)  
GE.CI.GRY.1224

**TAUPE**



30 x 60 cm (12 x 24)  
GE.CI.TPE.1224

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.  
For special orders please contact your Alpha Tile Sales Representative

# Callisto Series - Glazed Porcelain

## WHITE DECOR



30 x 60 cm (12 x 24) Decor  
GE.CI.WHT.1224.DEC

## IVORY DECOR



30 x 60 cm (12 x 24) Decor  
GE.CI.IVO.1224.DEC

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.  
For special orders please contact your Alpha Tile Sales Representative

# Callisto Series - Glazed Porcelain

## GREY DECOR



30 x 60 cm (12 x 24) Decor  
GE.CI.GRY.1224.DEC

## TAUPE DECOR



30 x 60 cm (12 x 24) Decor  
GE.CI.TPE.1224.DEC

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.  
For special orders please contact your Alpha Tile Sales Representative

# CALLISTO SERIES


# Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	< 0.5%	Conforms
Dynamic COF	ANSI A137.1-2012	0.42	Conforms
Bending / Breaking Strength	ISO 10545-4	≥ 250 lbs.	Conforms
Modulus of Rupture	ISO 10545-4	min. UB	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Visible Surface Abrasion Resistance	ISO 10545-7	PEI-4	Conforms (WHT, GRY & IVO)
Stain Resistance	ISO 10545-14	n/a	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

## Colour Variation

## Member

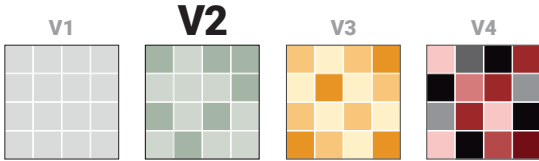

Member of Canada Green Building Council



Member of U.S. Green Building Council




Ceramic Tile Distributors of America (CTDA)



Marble Institute of America

For information concerning LEED, please contact our Sales Representative

## Examples of Recommended Applications

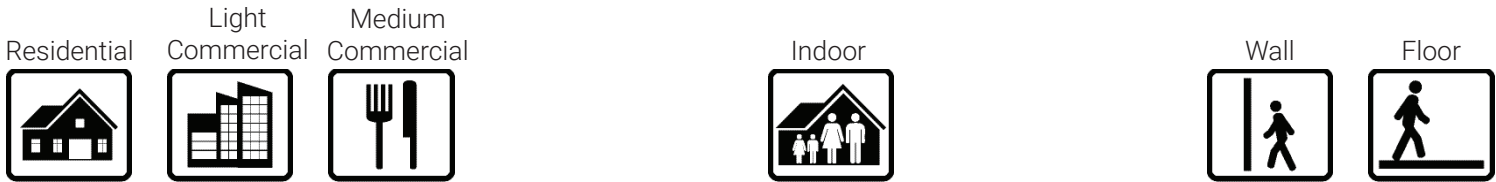

\*\*\*3D Decor for wall application only.

## Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24"	6	11.64	52	40



WWW.ALPHATILE.COM

alphatiles & stone  6

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
<b>TILE BOND COAT</b>	<ul style="list-style-type: none"> <li>• 66 FlexLite</li> <li>• 56SR LHT  Mortar</li> </ul>	<ul style="list-style-type: none"> <li>• 5400 Maxi-Flex</li> <li>• 51/44 Latex Mortar System</li> </ul>	<ul style="list-style-type: none"> <li>• 61 LFT Mortar</li> <li>• 56SR LHT Mortar</li> </ul>	<ul style="list-style-type: none"> <li>• 5400 Maxi-Flex</li> <li>• 51/44 Latex Mortar System</li> </ul>
<b>GROUT</b>	<ul style="list-style-type: none"> <li>* 500 PM Unsanded</li> <li>• 600 PM Sanded</li> <li>• ColourMax Plus Quartz</li> </ul>	<ul style="list-style-type: none"> <li>• 600 PM Sanded</li> <li>• 1600 RSG Fast Setting</li> </ul>	<ul style="list-style-type: none"> <li>• 600 PM Sanded</li> <li>• FlexEpoxy 100 Epoxy</li> </ul>	<ul style="list-style-type: none"> <li>• 600 PM Sanded</li> <li>• 1600 RSG Fast Set</li> </ul>
<b>CAULKING</b>	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)	Ultra Performance (colour-matched to grout)

### SURFACE PREPARATION (If Required)

- Floor levelling: 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing: WP900 Waterproof Membrane
- Crack Isolation/Uncoupling: Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

\* For a complete listing of FLEX TILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit [www.flextile.net](http://www.flextile.net)



## "MORE" Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	RTU	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	RTU	As Needed

\*Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.



WHITE Decor