



ROMA Series

GLAZED WALL

PORCELAIN

alphatile & stone 

Roma Series Glazed Wall

CALACATTA



25 x 75 cm (10 x 30)
FO.RM.CAL.1030



Filo Decor
25 x 75 cm (10 x 30)
FO.RM.CAL.1030.FILO

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile. For special orders please contact your Alpha Tile Sales Representative

Roma Series Glazed Wall

STATUARIO



25 x 75 cm (10 x 30)
FO.RM.STT.1030



Filo Decor
25 x 75 cm (10 x 30)
FO.RM.STT.1030.FILO

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile. For special orders please contact your Alpha Tile Sales Representative

Roma Series Coloured Body Porcelain

CALACATTA



7.5 x 30 cm (3 x 12)
FO.RM.CAL.0312




Nominal 25 cm (10)
FO.RM.CAL.10.HEX

IMPERIALE



7.5 x 30 cm (3 x 12)
FO.RM.IMP.0312

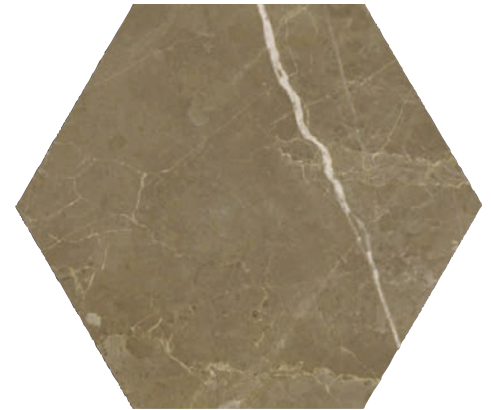

Nominal 25 cm (10)
FO.RM.IMP.10.HEX

CALACATTA / IMPERIALE DECOR MIX



Nominal 25 cm (10)
FO.RM.CAL/IMP.10.HEX

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile. For special orders please contact your Alpha Tile Sales Representative

Roma Series Coloured Body Porcelain

STATUARIO



7.5 x 30 cm (3 x 12)
FO.RM.STT.0312




Nominal 25 cm (10)
FO.RM.STT.10.HEX

GRAFITE



7.5 x 30 cm (3 x 12)
FO.RM.GFT.0312

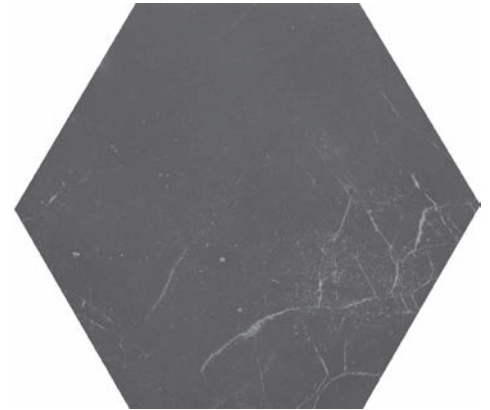

Nominal 25 cm (10)
FO.RM.GFT.10.HEX

STATUARIO / GRAFITE DECOR MIX



Nominal 25 cm (10)
FO.RM.STT/GFT.10.HEX


Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile. For special orders please contact your Alpha Tile Sales Representative

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	<0.5%	Conforms
Slip Resistance	DIN 51130	>R9	Conforms
Dynamic C.O.F.	ANSI A137.1-2012	>0.42	Conforms
Bending / Breaking Strength	ISO 10545-7	>1300N	Conforms
Deep Abrasion Resistance	ISO 10545-6	<175 mm ³	Conforms
Chemical Resistance	EN ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ASTM-C1378	>Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

Colour Variation

Member

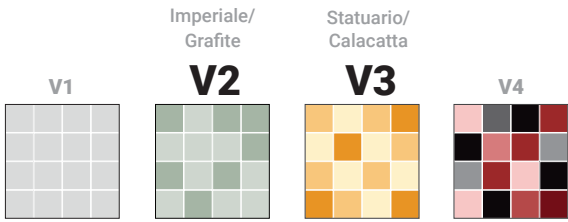

Examples of Recommended Applications



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
3"x12"	48	11.63	43	48
10" Hexagon & 10" Hexagon Decor	29	12.70	51.20	36
10"x30" Wall Tile	6	12.12	37.10	54
10"x30" Filo Decor	5	10.10	31.50	54

PRODUCT	WALL APPLICATION		FLOOR APPLICATION	
	Interior	Exterior	Interior	Exterior
TILE BOND COAT	<ul style="list-style-type: none"> 200 Type 1 Adhesive (suitable for Glazed Wall only) 56SR Full Coverage LHT 66 FlexLite (suitable for Glazed Wall) 	<ul style="list-style-type: none"> 5400 Maxi-Flex 51/44 Latex Mortar System 	<ul style="list-style-type: none"> 50 PM Mortar 52 Versatile 	<ul style="list-style-type: none"> 5400 Maxi-Flex 51/44 Latex Mortar System
GROUT	<ul style="list-style-type: none"> 500 PM Unsanded (suitable for Glazed Wall) 600 PM Sanded ColourMax Plus Quartz (suitable for Glazed Wall) 	<ul style="list-style-type: none"> 600 PM Sanded 1600 RSG Fast Setting 	<ul style="list-style-type: none"> 600 PM Sanded ColourMax Plus Quartz 	<ul style="list-style-type: none"> 600 PM Sanded 1600 RSG Fast Set
CAULKING	Ultra Performance Caulk (colour-matched to grout)	Ultra Performance Caulk (colour-matched to grout)	Ultra Performance Caulk (colour-matched to grout)	Ultra Performance Caulk (colour-matched to grout)

SURFACE PREPARATION (If Required)

- Floor levelling:** 59 Flex Flo / 5900 Flex Flo Plus Self Levelling Underlayment
- Waterproofing:** WP900 Waterproof Membrane
- Crack Isolation/Uncoupling:** Flexilastic 1000 Crack Isolation Membrane / FlexMat Uncoupling Membrane

*For a complete listing of FLEX TILE products and accessories including Sound Control, In-Floor Heating, and further setting options, please visit www.flextile.net

*Unless otherwise noted, all recommendations apply to colour body porcelain tiles only.



“MORE” Surface Care Product Guide

Task	Product Recommendation	Dilution with Water	Frequency
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years
Daily Maintenance	MORE™ Stone and Tile Cleaner	1 : 128 Ratio	Daily
Deep Cleaning	MORE™ Alkaline Cleaner	1 : 4 Ratio	As Needed
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed
Grout Haze - Epoxy / Urethane	MORE™ Coating Stripper*	Ready to use	As Needed

*Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.



Wall: Calacatta and Calacatta Filo Decor



3"x12" Imperiale



10" Hexagon Grafite



10" Hexagon Statuario